DISTRICT	COUNTY	ROUTE	PROJECT	SHEET
5-0	BERKS	US-222	100-27	7 OF 20
MAXATAWNY TWP				
REVISIONS				

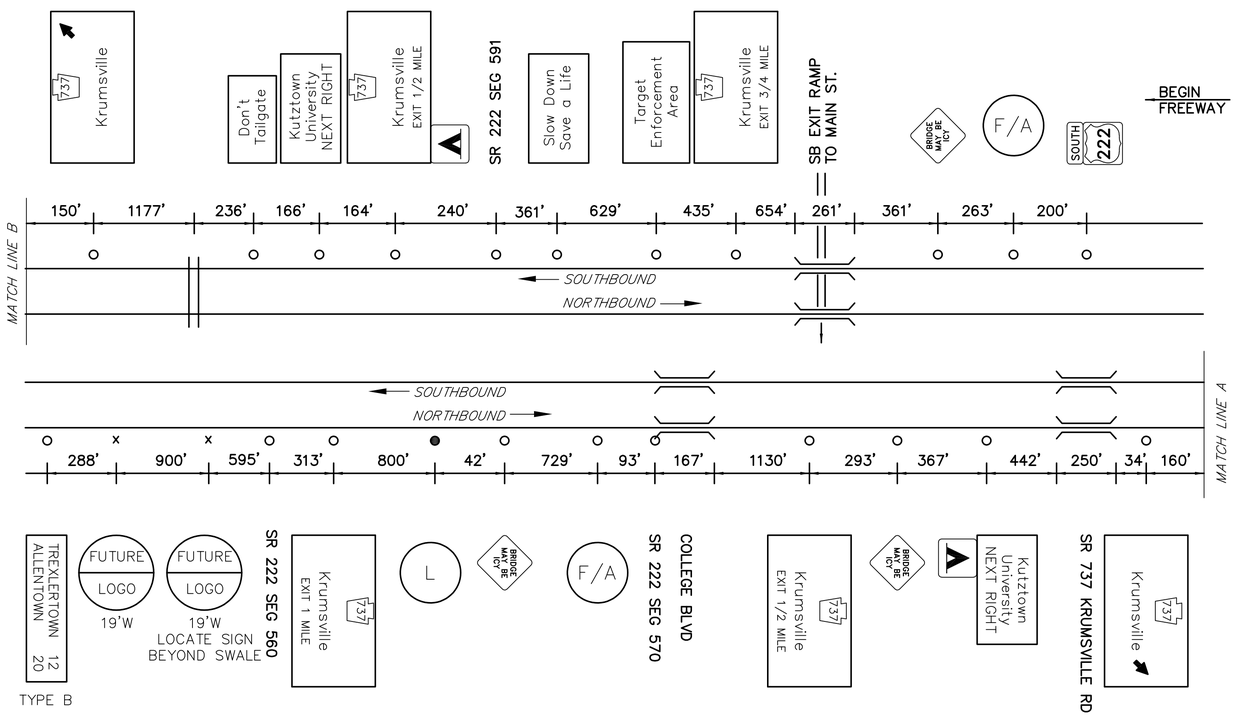

MAINLINE SCHEMATIC
NOT TO SCALE

TABULATION OF QUANTITIES		
ITEM	UNIT	QUANTITY
* STEEL S OR W BEAM POSTS	LBS.	884
BREAKAWAY SYSTEMS	EACH	2
POST MOUNTED SIGNS, TYPE A, LOGO	SQ.FT.	78
POST MOUNTED SIGNS, TYPE B, LOGO	SQ.FT.	20
REMOVE POST MOUNTED SIGNS,TYPE B,LOGO	EACH	–
LOGO SIGN MOUNTING	EACH	3
LOGO SIGN MOUNTING, RESET	EACH	–
REMOVE POST MOUNTED SIGNS, TYPE A, LOGO MODIFIED	EACH	–

* APPROXIMATE QUANTITY FOR INFORMATION ONLY

SYMBOLS

- ○ *Existing Sign to Remain*
- △ *Existing Sign to be Removed*
- □ *Existing Sign Reset as Shown*
- ● NEW SIGN
- × FUTURE SIGN
- Ø *Existing Utility Pole*

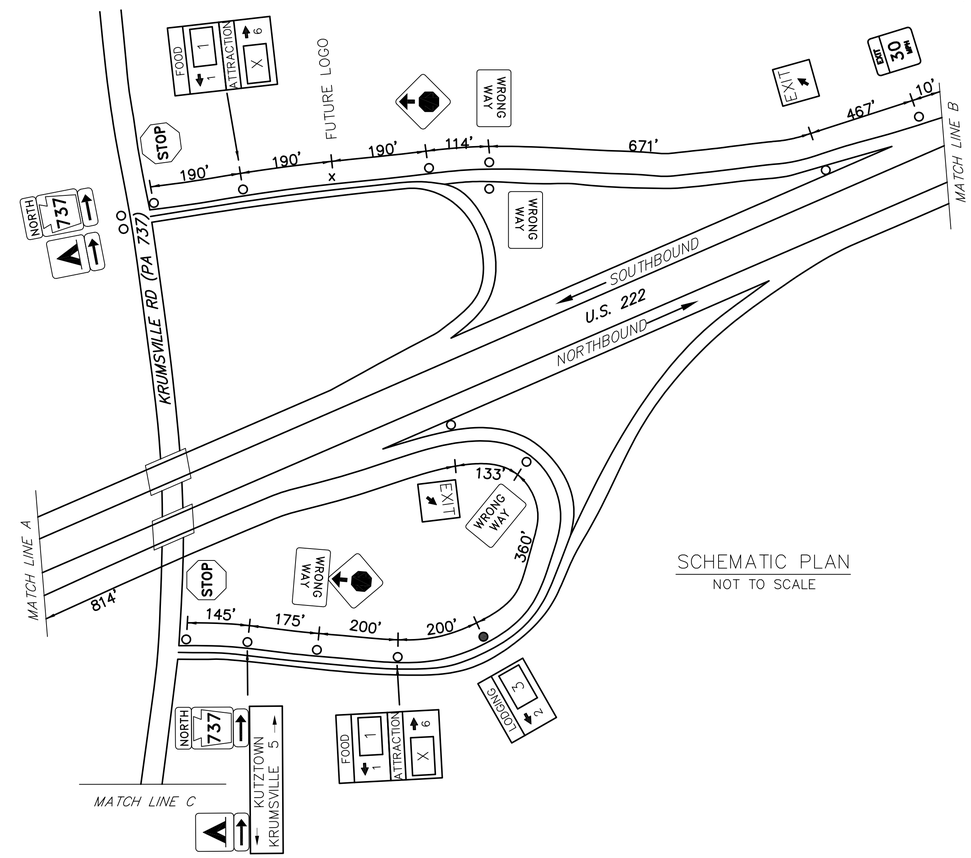

SCHEMATIC PLAN
NOT TO SCALE

KRUMSVILLE SPECIFIC INFORMATION PANEL			
LEGEND	DIRECTION	BUSINESS	LOGO NO.
FOOD	NB/SB	CAMILLO'S PIZZERIA & BAR	1
LODGING	NB	HAMPTON INN AND SUITES	3
ATTRACTION	NB/SB		

NB SIGNS

12'H X 19'W
FUTURE 16'H
W18x40 A572
TYPE IX LEGEND
TYPE III
BACKGROUND
B650 – #2, #2



6'H X 13'W
FUTURE 16'H
W10x26 A572
3M TYPE III
SBM – 650



SB SIGNS



MAIN PANEL 10'H X 19'W
FUTURE 14'H
W18x40 A572
EXIT PANEL 2'H X 8'-6"W
TYPE IX LEGEND
TYPE III BACKGROUND
B650 – #2, #2



222

PA 737

KRUMSVILLE

D:\2020JOBS\2002975-27\HW\PSE\DRAWINGS\100-27 SHT07-222_ EXIT KRUMSVILLE PLAN
November/15/2023 11:33 AM