DISTRICT	COUNTY	ROUTE	PROJECT	SHEET
8-0	ADAMS	U.S. 15		
STRABAN & OXFORD TOWNSHIPS				
REVISIONS				

TABULATION OF QUANTITIES		
ITEM	UNIT	QUANTITY
POST MOUNTED SIGNS, TYPE A, LOGO	SQ.FT.	–
POST MOUNTED SIGNS, TYPE B, LOGO	SQ.FT.	–
POST MOUNTED SIGNS, TYPE C, LOGO	SQ.FT.	–
BREAKAWAY SYSTEMS	EACH	–
* STEEL S OR W BEAM POSTS	LBS.	–
LOGO SIGN MOUNTING	EACH	–
REMOVAL OF POST MOUNTED MOTORIST SERVICE SIGNS, TYPES A & E	SQ.FT.	
REMOVAL OF POST MOUNTED MOTORIST SERVICE SIGNS, TYPES B, C & F	L.S.	

* APPROXIMATE QUANTITY FOR INFORMATION ONLY

SYMBOLS

- ○ *Existing Sign to Remain*
- △ *Existing Sign to be Removed*
- □ *Existing Sign Reset as Shown*
- ● NEW SIGN
- × FUTURE SIGN

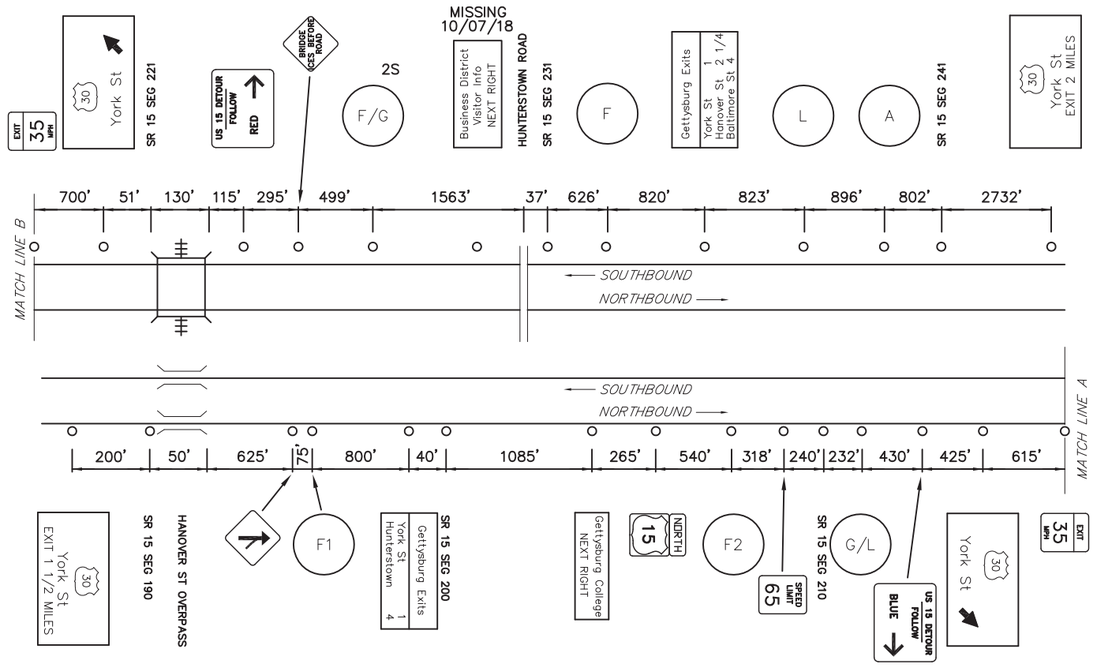

MAINLINE SCHEMATIC
NOT TO SCALE

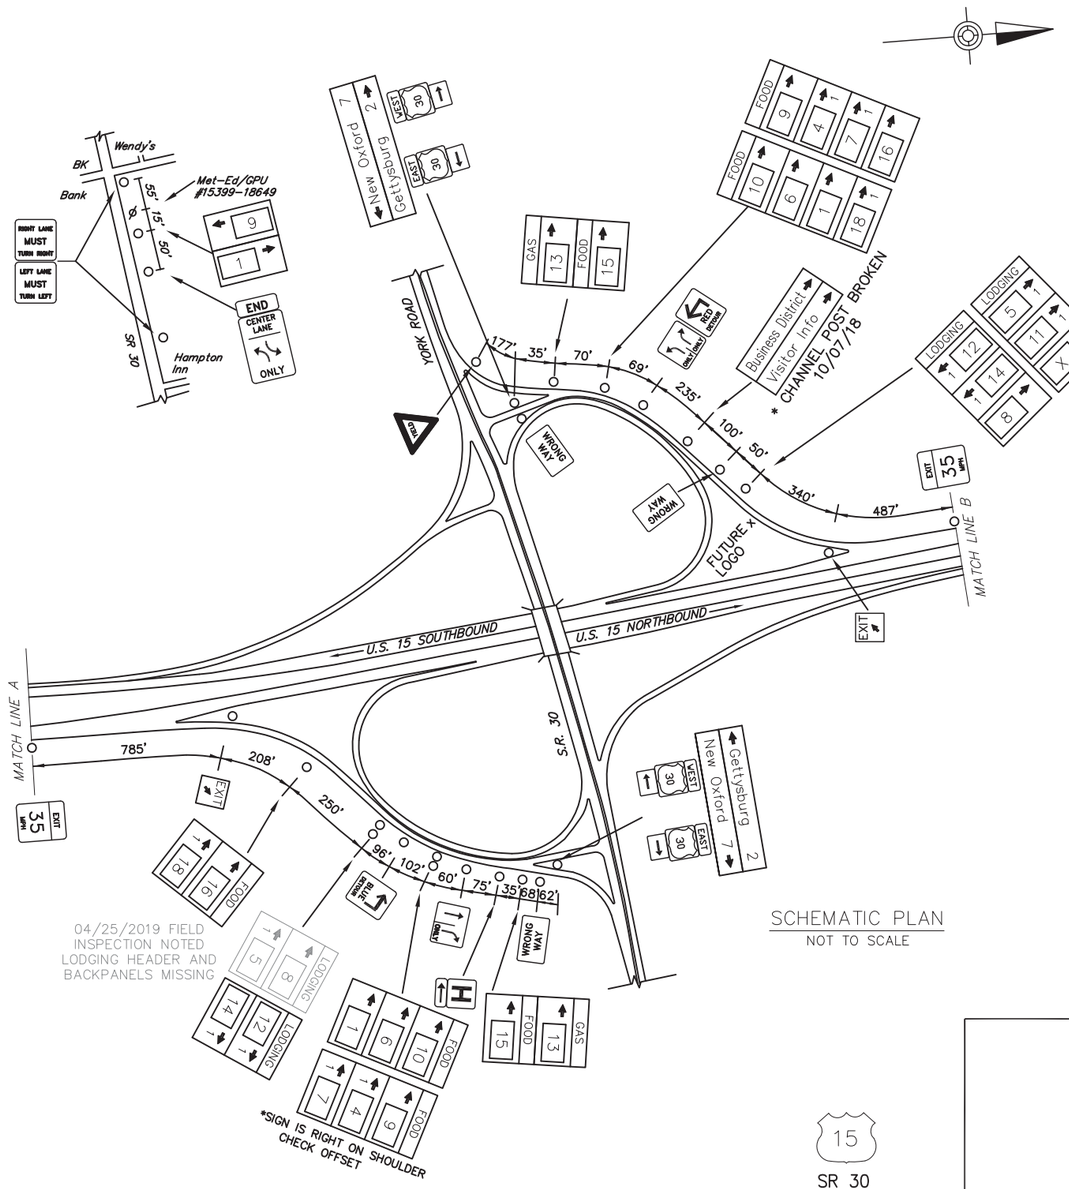

SCHEMATIC PLAN
NOT TO SCALE

04/25/2019 FIELD INSPECTION NOTED LODGING HEADER AND BACKPANELS MISSING

LEGEND

2S – GUIDE RAIL

FREEWAY LANE CLOSURES & RESTRICTIONS
ONLY PERMITTED BETWEEN 9:00 PM AND
6:00 AM MONDAY THRU FRIDAY.
DO NOT WORK DURING HOLIDAY PERIODS.

YORK ROAD SPECIFIC INFORMATION PANEL			
LEGEND	DIRECTION	BUSINESS	LOGO. NO.
FOOD	NB/SB	WENDY'S	1
		HOSS'S	4
		RUBY TUESDAY	6
		McDONALD'S	7
		BURGER KING	9
		SUBWAY	10
		SHEETZ	15
		TACO BELL	16
		PERKINS RESTAURANT	18
LODGING	SB	DAYS INN	11
	NB/SB	WYNDHAM GETTYSBURG	12
		HAMPTON INN	8
		HILTON GARDEN INN	5
		COURTYARD BY MARRIOTT	14
GAS	NB/SB	SHEETZ (DIESEL)	13
ATTRACTION			

NB SIGNS

16'Hx13'W
W12x26 A572
3M TYPE III
B650 – #2, #2



F2
14'Hx13'W
FUTURE 16'H
W10x26 A572
3M TYPE III
B650 – #2, #1



F1
10'Hx13'W
FUTURE 16'H
W10x26 A572
3M TYPE IV
SBM–650–#1,#1



SB SIGNS



16'Hx13'W
W14x30 A572
3M TYPE III
B650 – #2, #1



14'Hx13'W
W12x26 A572
3M TYPE III
B650 – #2, #2



14'Hx13'W
W12x26 A572
3M TYPE III
B650 – #2, #1



6'Hx19'W
FUTURE 12'H
W14x30 A572
B650 – #2, #1

15
SR 30
YORK ROAD

D:\2015_JOBS\215076-01\WW\PSE-AS-BUILT DRAWINGS\PENNDOT DISTRICT 08\ADAMS – 01\15-XX SHTXX-US15_YORK RD EXIT PLAN
June/11/2019 4:49 PM