| DISTRICT | COUNTY | ROUTE | PROJECT | SHEET |
|---|---|---|---|---|
| 4-0 | LACKAWANNA | I-380 | | |

COVINGTON TOWNSHIP

REVISIONS

| TABULATION OF QUANTITIES | | |
|---|---|---|
| ITEM | UNIT | QUANTITY |
| POST MOUNTED SIGNS, TYPE A, LOGO | SQ.FT. | |
| POST MOUNTED SIGNS, TYPE B, LOGO | SQ.FT. | |
| POST MOUNTED SIGNS, TYPE C, LOGO | SQ.FT. | |
| BREAKAWAY SYSTEMS | EACH | |
| * STEEL S OR W BEAM POSTS | LBS. | |
| LOGO SIGN MOUNTING | EACH | |
| FLAT SHEET PANEL REPLACEMENT | SQ.FT. | |
| EXTRUDED PANEL REPLACEMENT | SQ.FT. | |
| REMOVAL OF POST MOUNTED MOTORIST SERVICE SIGNS, TYPES B, C & F | L.S. | |

* APPROXIMATE QUANTITY FOR INFORMATION ONLY

SYMBOLS

- O *Existing Sign to Remain*
- △ *Existing Sign to be Removed*
- □ *Existing Sign Reset as Shown*
- ● NEW SIGN
- × FUTURE SIGN

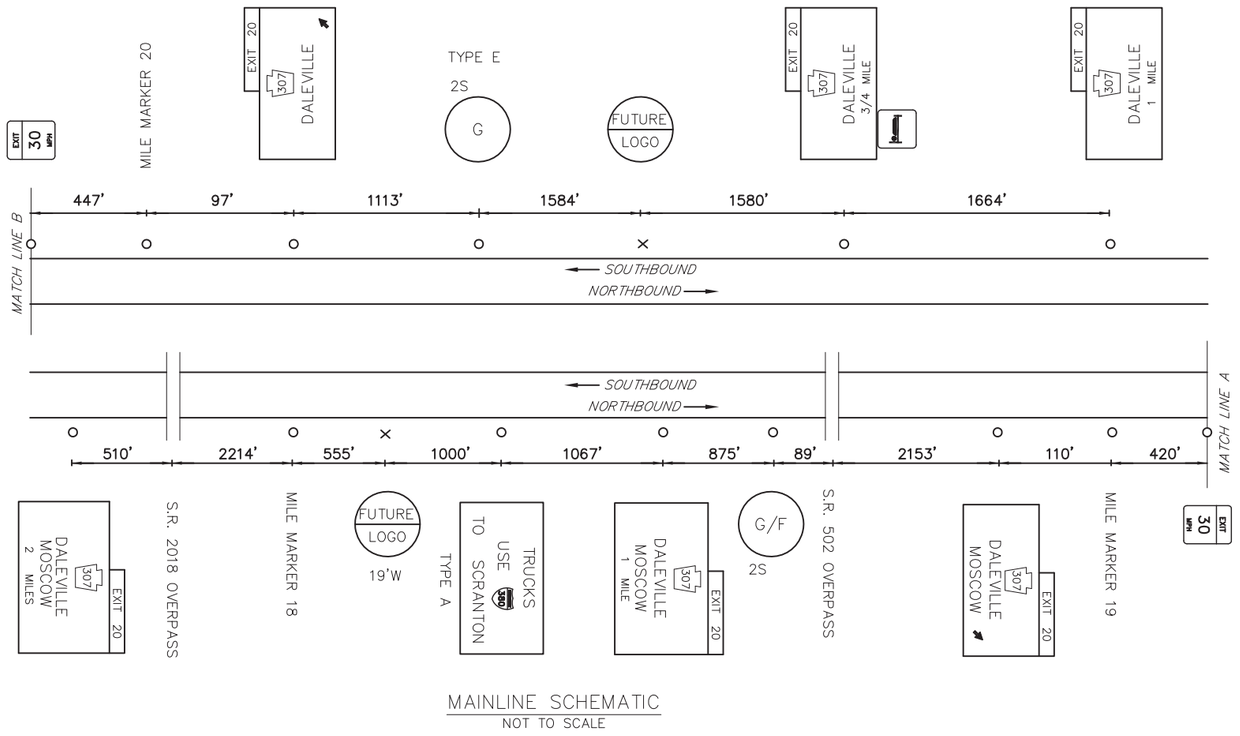


MAINLINE SCHEMATIC

NOT TO SCALE

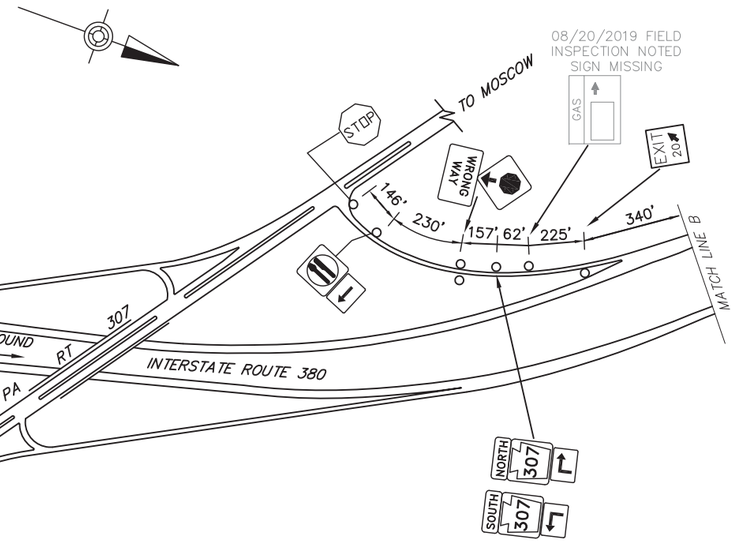


SCHEMATIC PLAN

NOT TO SCALE

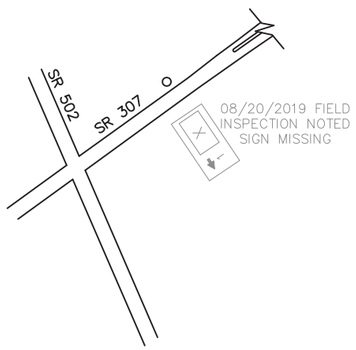


LEGEND

2S – GUIDE RAIL

| EXIT 20 SPECIFIC INFORMATION PANEL | | | |
|---|---|---|---|
| LEGEND | DIRECTION | BUSINESS | LOGO. NO. |
| GAS | NB/SB | | |
| | | | |
| | | | |
| | | | |
| FOOD | NB | | |
| | | | |
| | | | |
| | | | |

NB SIGNS

12'Hx13'W
FUTURE 16'H
W12x26 A572
3M TYPE III
B650 – #1, #2

GAS – EXIT 20

FOOD – EXIT 20 X

SB SIGNS

GAS – EXIT 20

6'Hx13'W
3M TYPE III
TYPE E

INTERSTATE 380

DALEVILLE

EXIT 20

D:\2015_IDB\215076-01\hw\PSE\AS-BUILT DRAWINGS\PENNDOT DISTRICT 04\LACKAWANNA - 2015-XX SHTXX-I380_EXIT 20 PLAN
Dc:tokerr/17/2019 10:00 AM